




OR stationary reader

The universal stationary reader is an ideal addition for the BiTech family for use in the administration office.

The OR reader easily connects with a PC via the RS232 interface

As with all BiTech readers the OR reader has a long reading distance.

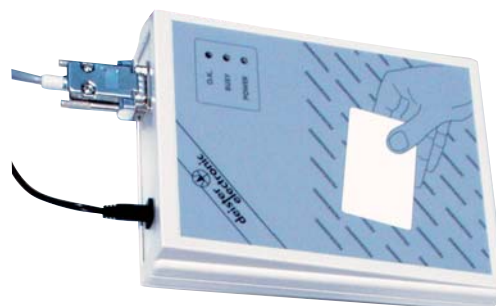

The OR reader has many unique features:

- **compatible** to many already existing waste- ID-systems
- **portable**
- **maintenance free**
- For use with **different transponder** types

Technical Data

Dimensions :	1170 x 135 x 85 mm
Material:	ABS
Weight :	ca. 500 g
Protection type:	IP 54
Operating frequency:	125 kHz, 134,2 kHz 13,56 MHz (optional)
Transponder:	Read Only OTP Read/Write
Transmission mode:	FDX HDX
Modulation mode:	ASK, FSK
Operating voltage:	8...30V, max. 150mA
Operating temperature:	-0°C ... +85°C
Interface:	RS 232



The RFID Company

For more information and your nearest point of contact, please refer to www.deister.com Technical data subject to change without notice at any time. The product conforms to CE-regulations. All rights reserved. © Copyright 2005 by deister electronic

deister
electronic

wm_or_eb.qxd
V 08/11/05 TM/BF